



EA164DB-8-41 (1/2")インパクトソケット

6ポイント
差込角 1/2"

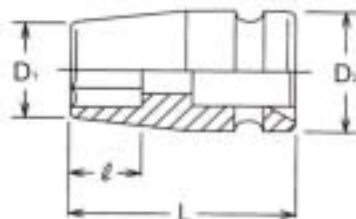

	mm	D1(mm)	D2(mm)	l(mm)	L(mm)	適用ピン	適用リング	重量(g)		
EA164DB-8	8	14.5	25	6	38	EA164AA-3.5A	EA164A-19	85		
EA164DB-9	9	15.7	25	7	38			85		
EA164DB-10	10	17	25	7	38			85		
EA164DB-11	11	18.2	25	8	38			85		
EA164DB-12	12	19.5	25	9	38			85		
EA164DB-13	13	20.7	25	10	38			85		
EA164DB-14	14	22	25	10	38			85		
E1A64DB-15	15	23.2	30	11	38			EA164AA-3.5B	EA164A-24	130
EA164DB-16	16	24.5	30	11	38					130
EA164DB-17	17	25.7	30	12	38					130
EA164DB-18	18	27	30	13	38	130				
EA164DB-19	19	28.2	30	13	38	125				
EA164DB-20	20	29.5	30	13	38	127				
EA164DB-21	21	30.7	30	14	38	120				
EA164DB-22	22	32	30	14	38	130				
EA164DB-23	23	33.2	30	14	38	130				
EA164DB-24	24	34.5	30	14	38	135				
EA164DB-25	25	35.7	30	14	38	135				
EA164DB-26	26	37	30	14	38	160				
EA164DB-27	27	38.2	30	16	40	160				
EA164DB-28	28	39.5	30	16	40	170				
EA164DB-29	29	40.7	30	17	40	190				
EA164DB-30	30	42	30	17	40	190				
EA164DB-31	31	43.2	30	17	40	213				
EA164DB-32	32	44.5	30	18	40	216				
EA164DB-33	33	45.7	30	19	40	260				
EA164DB-34	34	47	30	19	40	263				
EA164DB-36	36	49.5	30	20	40	285				
EA164DB-41	41	55.7	30	21	40	411				

(例)

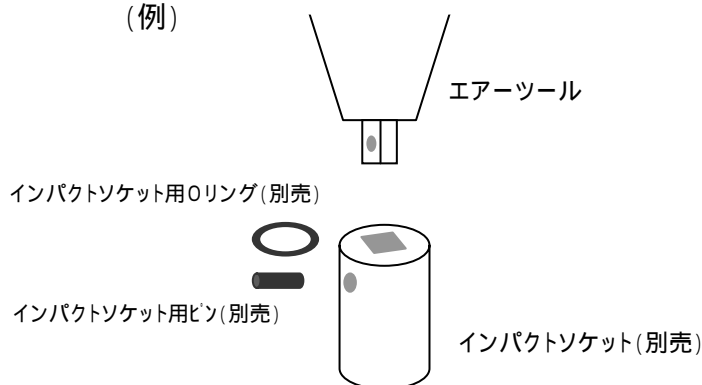

必ずインパクトソケット用ピン、Oリングを併用してください。